

ICPOL Conferences

19 de abril de 2023

14h00

Pré-inscrição: seminario@psp.pt

A NOVA GEOPOLÍTICA DA SEGURANÇA: CIBERESPAÇO E DIMENSÕES DISRUPTIVAS



LUÍS TOMÉ
UAL



NUNO PERRY
RAM



HÉLDER JESUS
IUM



MÁRIO SILVA
UAL



PEDRO MATOS
CNCS



VÍTOR COSTA
SGMAI

 **POLÍCIA**
SEGURANÇA PÚBLICA



 **ICPOL – R&D&I Unit**
Ad Orbem Per Scientia

FCT Fundação
para a Ciência
e a Tecnologia

ICPOL Conferences

19 de abril de 2023

14h00

Pré-inscrição: seminario@psp.pt

A NOVA GEOPOLÍTICA DA SEGURANÇA: CIBERESPAÇO E DIMENSÕES DISRUPTIVAS



LUÍS TOMÉ
UAL



NUNO PERRY
RAM



HÉLDER JESUS
IUM



MÁRIO SILVA
UAL



PEDRO MATOS
CNCS



VÍTOR COSTA
SGMAI

 **POLÍCIA**
SEGURANÇA PÚBLICA



 **ICPOL** R&D&I Unit
At Ordem e Progresso

FCT Fundação
para a Ciência
e a Tecnologia

Mário Marques da Silva
Associate Professor at Universidade
Autónoma de Lisboa

Director of the Department of
Engineering and Computer Sciences
Researcher at Instituto de
Telecomunicações
mmsilva@autonoma.pt

O Contributo do 5G e do 6G
para a Quarta Revolução Industrial

Reference

- M. Marques da Silva, J. Guerreiro, “On the 5G and Beyond”, MDPI Applied Sciences, 10, 7091, **26 October 2020** (<https://www.mdpi.com/2076-3417/10/20/7091>)

Article

On the 5G and Beyond

Mário Marques da Silva ^{1,2,*} and João Guerreiro ^{1,3}

¹ Institute of Telecommunications, 1049-001 Lisboa, Portugal; jf.guerreiro@fct.unl.pt

² Department of Sciences and Technologies, Autonomia University of Lisbon, 1150-293 Lisboa, Portugal

³ Department of Electrical and Computer Engineering, NOVA School of Science and Technology, 825-149 Caparica, Portugal

* Correspondence: mmsilva@autonomia.pt; Tel.: +351-213-177-654

Received: 30 August 2020; Accepted: 9 October 2020; Published: 12 October 2020



Featured Application: Introductory Article of the MDPI Special Issue “Transmission Techniques for 5G and Beyond”.

Abstract: This article provides an overview of the fifth generation of cellular communications (5G) and beyond. It presents the transmission techniques of current 5G communications and those expected of future developments, namely a brief study of non-orthogonal multiple access (NOMA) using the single carrier with frequency domain equalization (SC-FDE) block transmission technique, evidencing its added value in terms of spectral efficiency. An introduction to the sixth generation of cellular communications (6G) is also provided. The insertion of 5G and 6G within the Fourth Industrial Revolution framework (also known as Industry 4.0) is also dealt with. Consisting of a change in paradigm, when compared to previous generations, 5G supports a myriad of new services based on the Internet of things (IoT) and on vehicle-to-vehicle (V2V) communications, supporting technologies such as autonomous driving, smart cities, and remote surgery. The new services provided by 5G are supported by new techniques, such as millimeter waves (mm-wave), in addition to traditional microwave communication, and by massive multiple-input multiple-output (m-MIMO) technology. These techniques were not employed in the fourth generation of cellular communications (4G). While 5G plays an important role in the initial implementation of the Fourth Industrial Revolution, 6G will address a number of new services such as virtual reality (VR), augmented reality (AR), holographic services, the advanced Internet of things (IoT), AI-infused applications, wireless brain-computer interaction (BCI), and mobility at higher speeds. The current research on systems beyond 5G indicates that these applications shall be supported by new MIMO techniques and make use of terahertz (THz) bands.

Keywords: 5G; 6G; NOMA; Industry 4.0; massive MIMO; mm-wave; IoT

1. Introduction

The Fourth Industrial Revolution considers the replacement of humans by machines in certain tasks, or the development of new or more efficient tasks. Making use of robots and artificial intelligence, the Fourth Industrial Revolution is already deeply modifying society and organizations [1]. As seen in Figure 1 the Fourth Industrial Revolution comprises other parameters besides robots and artificial intelligence [2]. Robots need to communicate and to sense the environment (using sensors and communications), for which the Internet of things (IoT) is employed (all over the Internet protocol (IP)). The IoT generates massive quantities of data (big data) that will be processed with artificial intelligence to generate knowledge; that is, the data supports human decision-making, as well as decisions made by the robots. [3]. These new technologies will originate a deep modification of society with great impact on the human way of life, as well as on the employment market [4].

Reference

- M. Marques da Silva, R. Dinis, “Power-Ordered NOMA with Massive MIMO for 5G Systems”, MDPI Applied Sciences, 11(8), 3541, **15 April 2021** (<https://doi.org/10.3390/app11083541>)

Article

Power-Ordered NOMA with Massive MIMO for 5G Systems

Mário Marques da Silva ^{1,2,*} and Rui Dinis ^{1,3}

- ¹ Instituto de Telecomunicações, 1049-001 Lisboa, Portugal; rdinis@ict.unl.pt
 - ² Department of Sciences and Technologies, Universidade Autónoma de Lisboa, 1169-023 Lisboa, Portugal
 - ³ Faculty of Sciences and Technology, Universidade Nova, 2829-516 Caparica, Portugal
- * Correspondence: mmsilva@autonoma.pt

Abstract: The aim of this article is to study the conventional and cooperative power-order Non-Orthogonal Multiple Access (NOMA) using the Single Carrier with Frequency Domain Equalization (SC-FDE) block transmission technique, associated with massive Multiple-Input Multiple-Output (MIMO), evidencing its added value in terms of spectral efficiency of such combined scheme. The new services provided by Fifth Generation of Cellular Communications (5G) are supported by new techniques, such as millimeter waves (mm-wave), alongside the conventional centimeter waves and by massive MIMO (m-MIMO) technology. NOMA is expected to be incorporated in future releases of 5G, as it tends to achieve a capacity gain, highly required for the massive number of Internet of things (IoT) devices, namely to support an efficient reuse of limited spectrum. This article shows that the combination of conventional and cooperative NOMA with m-MIMO and SC-FDE, tends to achieve capacity gains, while the performance only suffers a moderate degradation, being an acceptable alternative for future evolutions of 5G. Moreover, it is shown that Cooperative NOMA tends to outperform Conventional NOMA. Moreover, this article shows that the Maximum Ratio Combiner (MRC) receiver is very well fitted to be combined with NOMA and m-MIMO, as it achieves a good performance while reducing the receiver complexity.

Keywords: NOMA; massive MIMO; SC-FDE; mm-wave; 5G



Citation: Marques da Silva, M.; Dinis, R. Power-Ordered NOMA with Massive MIMO for 5G Systems. *Appl. Sci.* **2021**, *11*, 3541. <https://doi.org/10.3390/app11083541>

Academic Editor: Amalia Miliou

Received: 11 March 2021
Accepted: 8 April 2021
Published: 15 April 2021

Publisher's Note: MDPI stays neutral with regard to jurisdictional claims in published maps and institutional affiliations.



Copyright © 2021 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (<https://creativecommons.org/licenses/by/4.0/>).

1. Introduction

The Fourth Industrial Revolution, comprising the replacement of humans by machines in certain tasks, is originating deep societal, organizational and corporate changes, in areas such as industries, agriculture, mobility (with special focus on autonomous vehicles), home safety and automation, lawyer and medical advice, etc. [1]. These modifications are being carried out making use of technologies, such as robots, artificial intelligence, big data, Internet of Things (IoT) or 3D printing [2]. Appendix A contains a list of acronyms that can be used for clarification.

5G represents a change of paradigm when compared to previous generations. These modifications aim to give a strong contribution, from the cellular communications point of view, to the implementation of the Fourth Industrial Revolution. One important novelty of 5G relies on the implementation of three use cases to provide different services. Moreover, while previous cellular generations comprised communications always established through base stations, 5G allows direct communications (device-to-device), which is especially important to support IoT, widely used, e.g., in smart cities or autonomous vehicles.

As can be seen in Figure 1, 5G communications comprise different groups of use cases in order to support different services: Enhanced Mobile Broadband (eMBB), massive Machine-Type Communications (mMTC) and Ultra Reliable Low Latency Communications (URLLC). These groups of use cases support the concept entitled network slicing, which aims to provide to different users the requirements of the services that are being utilized. For example, autonomous vehicles require communications that are highly reliable and almost real-time, which are supported by URLLC. On the other hand, smart cities require

Reference

- M. Marques da Silva, R. Dinis, G., Martins, “On the Performance of LDPC-Coded Massive MIMO Schemes with Power-Ordered NOMA Techniques”, MDPI Applied Sciences 11(18), 8684, 17 September 2021, (<https://doi.org/10.3390/app11188684>)

Article

On the Performance of LDPC-Coded Massive MIMO Schemes with Power-Ordered NOMA Techniques

Mário Marques da Silva ^{1,2,3,*}, Rui Dinis ^{1,2,3} and Gelson Martins ²

¹ Instituto de Telecomunicações, 1049-001 Lisboa, Portugal; rdinis@ict.unl.pt
² Department of Sciences and Technologies, Universidade Autónoma de Lisboa, 1169-023 Lisboa, Portugal; 30005668@students.ual.pt
³ Autónoma TechLab, 1169-023 Lisboa, Portugal
⁴ Faculty of Sciences and Technology, Universidade Nova, 2829-516 Caparica, Portugal
* Correspondence: mmsilva@autonoma.pt

Abstract: This article studies the power-ordered Non-Orthogonal Multiple Access (NOMA) techniques associated with Low-Density Parity-Check (LDPC) codes, adopted for use in the fifth generation of cellular communications (5G). Both conventional and cooperative NOMA are studied, associated with Single Carrier with Frequency Domain Equalization (SC-FDE) and massive Multiple-Input Multiple-Output (MIMO). Billions of Internet of Things (IoT) devices are aimed to be incorporated by the Fourth Industrial Revolution, requiring more efficient use of the spectrum. NOMA techniques have the potential to support that goal and represent strong candidates for incorporation into future releases of 5G. This article shows that combined schemes associated with both conventional and cooperative LDPC-coded NOMA achieve good performance while keeping the computational complexity at an acceptable level.

Keywords: NOMA; LDPC; massive MIMO; SC-FDE; 5G

Citation: da Silva, M.; Dinis, R.; Martins, G. On the Performance of LDPC-Coded Massive MIMO Schemes with Power-Ordered NOMA Techniques. *Appl. Sci.* 2021, 11, 8684. <https://doi.org/10.3390/app11188684>

Academic Editor: Akram Alomainy

Received: 25 August 2021
Accepted: 13 September 2021
Published: 17 September 2021

Publisher's Note: MDPI stays neutral with regard to jurisdictional claims in published maps and institutional affiliations.



Copyright © 2021 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (<http://creativecommons.org/licenses/by/4.0/>).

1. Introduction

The Fourth Industrial Revolution consists of the revolution of robots. Artificial intelligence is utilized to support the decision-making of robots, namely, to process a large amount of data (big data) that is generated with high data rate communications and using a wide variety of sensors and Internet of Things (IoT) devices. The Fourth Industrial Revolution is already deeply modifying humans and society in a myriad of areas, such as economy, mobility, housing, teaching, health, agriculture, medical and lawyer counselling, defense, wildlife monitoring, etc. [1,2].

From the communication and IoT point of view, the fifth generation of cellular communications (5G) was designed to offer the services required by the Fourth Industrial Revolution, representing a modification of the paradigm when compared to previous generations. One novelty of 5G relies on the ability to support direct device-to-device communication without requiring a base station, which is needed to support IoT devices required for autonomous vehicles, smart logistics, and smart cities. Moreover, as can be seen from Figure 1, to support different services with the required reliability, 5G is split into three groups of use cases: Enhanced Mobile Broadband (eMBB), massive Machine-Type Communications (mMTC) and Ultra-Reliable Low Latency Communications (URLLC). These three groups support the network slicing concept, which aims to provide diverse requirements for different users. For example, smart cities employ an extremely high number of devices with low power consumption, which is supported by mMTC. On the other side, autonomous vehicles require communication that is highly reliable and almost real-time, which is supported by URLLC.

Reference

- Ali Gashtasbi, Mário Marques da Silva, and Rui Dinis. "IRS, LIS, and Radio Stripes-Aided Wireless Communications: A Tutorial" MDPI, Applied Sciences 12, no. 24: 12696; **11 December 2022**; <https://doi.org/10.3390/app122412696>

Tutorial

IRS, LIS, and Radio Stripes-Aided Wireless Communications: A Tutorial

Ali Gashtasbi ^{1,*}, Mário Marques da Silva ^{2,3,4} and Rui Dinis ^{1,3,4}

¹ Faculty of Sciences and Technology, Universidade Nova, 2829-516 Caparica, Portugal
² Department of Sciences and Technologies, Universidade Autónoma de Lisboa, 1169-023 Lisboa, Portugal
³ Autonomia TechLab, 1169-023 Lisboa, Portugal
⁴ Instituto de Telecomunicações, 1049-001 Lisboa, Portugal
* Correspondence: a.gashtasbi@campus.fct.unl.pt

Abstract: This is a tutorial on current techniques that use a huge number of antennas in intelligent reflecting surfaces (IRS), large intelligent surfaces (LIS), and radio stripes (RS), highlighting the similarities, differences, advantages, and drawbacks. A comparison between IRS, LIS, and RS is performed in terms of the implementation and capabilities, in the form of a tutorial. We begin by introducing the IRS, LIS, and RS as promising technologies for 6 G wireless technology. Then, we will look at how the three notions are applied in wireless networks. We discuss various performance indicators and methodologies for characterizing and improving the performance of IRS, LIS, and RS-assisted wireless networks. We cover rate maximization, power consumption reduction, and cost implementation concerns in order to take advantage of the performance increase. Furthermore, we extend the discussion to some cases of emerging use. In the description of the three concepts, IRS-assisted communication was introduced as a passive system, considering the capacity/data rate, with power optimization being an advantage, while channel estimation was a challenge. LIS is an active component that goes beyond massive MIMO; a recent study found that channel estimation issues in IRS had improved. In comparison to IRS, capacity enhancement is a highlight, and user interference showed a trend of decreasing. However, power consumption due to utilizing power amplifiers has restrictions. The third technique for increasing coverage is cell-free massive MIMO with RS, with easy deployment in communication network structures. It is demonstrated to have suitable energy efficiency and power consumption. Finally, for future work, we further propose expanding the conversation to include some cases of new uses, such as complexity reduction; design and simulation with LDPC code could be a solution to decreasing complexity.

Keywords: IRS; LIS; RS; 6 G



Citation: Gashtasbi, A.; da Silva, M.M.; Dinis, R. IRS, LIS, and Radio Stripes-Aided Wireless Communications: A Tutorial. *Appl. Sci.* **2022**, *12*, 12696. <https://doi.org/10.3390/app122412696>

Academic Editor: Juan-Carlos Cano

Received: 14 November 2022

Accepted: 7 December 2022

Published: 11 December 2022

Publisher's Note: MDPI stays neutral with regard to jurisdictional claims in published maps and institutional affiliations.



Copyright: © 2022 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (<https://creativecommons.org/licenses/by/4.0/>).

1. Introduction

1.1. Motivation

The fifth generation (5G) telecommunications network structure has been developed and deployed. With the increasing popularity of Internet of Things (IoT) adoption among users, it is urgent to upgrade the existing working network to 6 G [1]. While improving the new design, attention to the needs of the users is expected. It includes increased capacity, higher data rates, increased bandwidth, less interference, the highest quality of service (QoS) for users, and low-cost implementation for operators [2]. This optimization is created on the side of the base station by increasing the number of antennas using MIMO, cell-free MIMO technology, and also using low-power small cells in a dense network. Therefore, designers are looking for three new techniques—IRS, LIS, and radio stripes—to deploy in the network. Intelligent reflecting surfaces (IRS) have piqued the interest of academics and businesses as a possible early-stage technology [3]. Usually, a wireless cellular communications network uses transceiver end-point transmission techniques to limit or use

Reference

- Ali Gashtasbi, Mário Marques da Silva, Rui Dinis, and João Guerreiro. "On the Performance of LDPC-Coded Large Intelligent Antenna System" MDPI, Applied Sciences Vol. 13, no. 8: 4738; **April 2023**; <https://doi.org/10.3390/app13084738>

Article

On the Performance of LDPC-Coded Large Intelligent Antenna System

Ali Gashtasbi ¹, Mário Marques da Silva ^{2,3,4,5,*}, Rui Dinis ^{1,3,4} and João Guerreiro ^{1,3,4}

¹ Faculty of Sciences and Technology, Universidade Nova, 2829-516 Caparica, Portugal
² Department of Engineering and Computer Sciences, Universidade Autónoma de Lisboa, 1169-023 Lisboa, Portugal
³ Autónoma TechLab, 1169-023 Lisboa, Portugal
⁴ Instituto de Telecomunicações, 1049-001 Lisboa, Portugal
⁵ C12—Centro de Investigação em Cidades Inteligentes, 2300-313 Tomar, Portugal
* Correspondence: mmsilva@autonoma.pt

Abstract: This article studies Large Intelligent Systems (LIS) along with Single Carrier with Frequency Domain Equalization (SC-FDE), utilizing Low-Density Parity-Check (LDPC). Four different receivers are studied in the scenarios described above, namely Equal Gain Combining (EGC), Maximum Ratio Combining (MRC), Zero Forcing (ZF), and Minimum Mean Squared Error (MMSE). The results of this article show that the use of LDPC codes leads to an improvement of performance by about 2 dB for a 4X25 LIS system and by 3 dB for a 4X225 LIS system, as compared to similar systems without LDPC codes. Moreover, for all simulations, the MMSE receiver achieves the best overall performance, while EGC performs the worst.

Keywords: 6G; LDPC; LIS systems; SC-FDE



Citation: Gashtasbi, A.; da Silva, M.M.; Dinis, R.; Guerreiro, J. On the Performance of LDPC-Coded Large Intelligent Antenna System. *Appl. Sci.* **2023**, *13*, 4738. <https://doi.org/10.3390/app13084738>

Academic Editors: Christos Bouras and Junseop Lee

Received: 14 December 2022

Revised: 19 February 2023

Accepted: 7 April 2023

Published: 10 April 2023



Copyright: © 2023 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (<https://creativecommons.org/licenses/by/4.0/>).

1. Introduction

1.1. Motivation

The future of communications is going to become intelligent and interactive as it tries to make human-made surfaces electronically active, improving wireless communication. In this regard, the emergence of the Internet of Things (IoT) and billions of terminals that require access to wireless communications have made researchers put a lot of effort into solving communication problems [1]. m-MIMO (Massive MIMO—Multiple Input Multiple Output), UM-MIMO (Ultra Massive-MIMO), and ELAA (Extremely Large Antenna Arrays) are three of the most significant developments in communication system design in recent decades, and they have significantly improved data rate, network capacity, and performance. In this regard, the LIS concept can be viewed as a beyond-massive MIMO in a telecommunications network with increased capacity and data rate, where the number of antennas is even higher.

Traditionally, wireless communications are established in the far-field, that is, with propagation distances beyond the Fraunhofer distance (the Fraunhofer distance is only a few wavelengths). The LIS system comprises several panels, and each panel includes several antenna elements. The LIS system acts as a near-field beamforming; that is, the communication is established behind the Fraunhofer distance [2,3]. In this case, the individual array elements are in the far-field but not the array as a whole. Consequently, the focus is established not only in the bearing and elevation planes but also in the distance dimension. This allows for the reduction of interferences between users that are aligned but located at different ranges, bringing another advantage, as compared to traditional beamforming. The typical distance between the antenna elements is $\lambda/2$. The channel correlation between the antenna elements allows for the creation of the above-described beam.

1. The Digital Transformation

2. 5G Communications

3. 6G Communications

1. The Digital Transformation



2. 5G Communications

3. 6G Communications

What is “Digital Transformation”?

- Analog Electronics (Forties)
- Phase 1: Digital Electronics (Eighties)
- Phase 2: All-over-IP
- **Phase 3: Automation** || **4th Industrial Revolution - Knowledge Age**
 - *ChatGPT versus static information*

3rd Industrial Revolution
Information Age

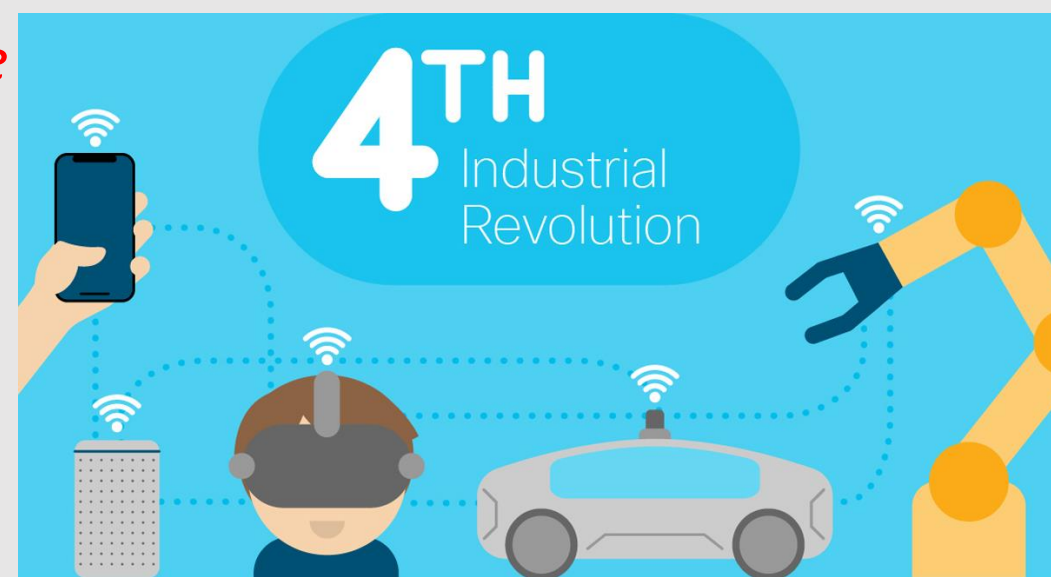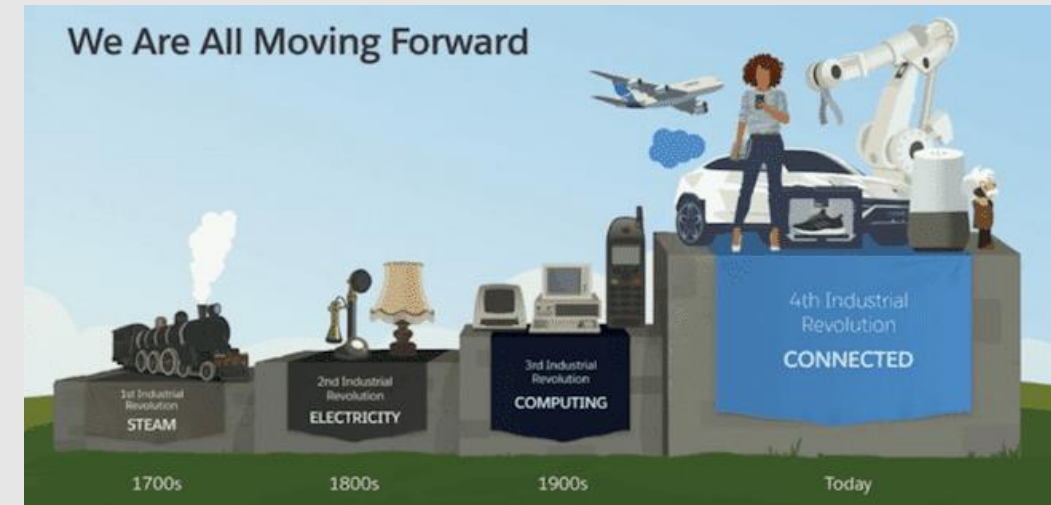

1. The Digital Transformation




The **4th Industrial Revolution** is characterized by the massive use of **Robots**, as well as **Artificial Intelligence**, **Big Data**, **Internet of Things**, **3D Printing**, **Quantum Computing**.

More **efficient use of the Resources**.

These technologies potentiate the **replacement of Humans by Robots** in different areas.

- **Some Jobs disappear, others are created**, requiring a great human **adaptation** to this new **Paradigm**.
- **Knowledge Age** – Routine Actions and Decisions are implemented by machines.
 - **Scientific, technical and human skills**, critical thinking, emotional intelligence, abstract thinking, became more important assets than tangible goods.
 - **Corporates are becoming capital-intensive**.
 - **Nova Ordem Mundial**

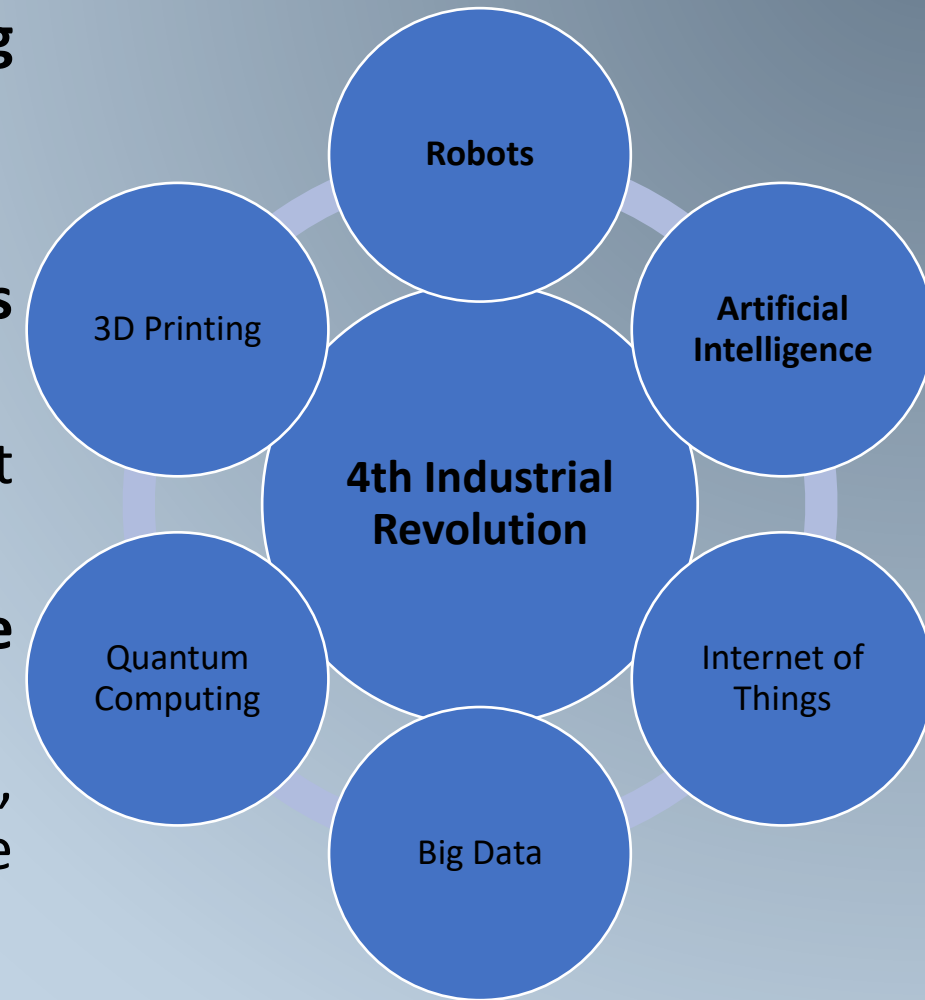

4th Industrial Revolution

- **Massive IoT & 5G**


- **5G is disruptive:** not only higher throughputs and lower latency - Introduction of **Machine-to-Machine Communications - point-to-point (IoT)**, instead of through Base Station.
- Speeds up to **20 times higher** (20 Gb/s) & latency 10 times lower (than 4G).

- **Big Data**

- Consists of the generation of **massive quantity of data**, structured or not, which can be processed by **Artificial Intelligence** to generate **Knowledge**.


- **Robotic & Artificial Intelligence**

- A robot moves, but has also to **make decisions** → **Artificial Intelligence**

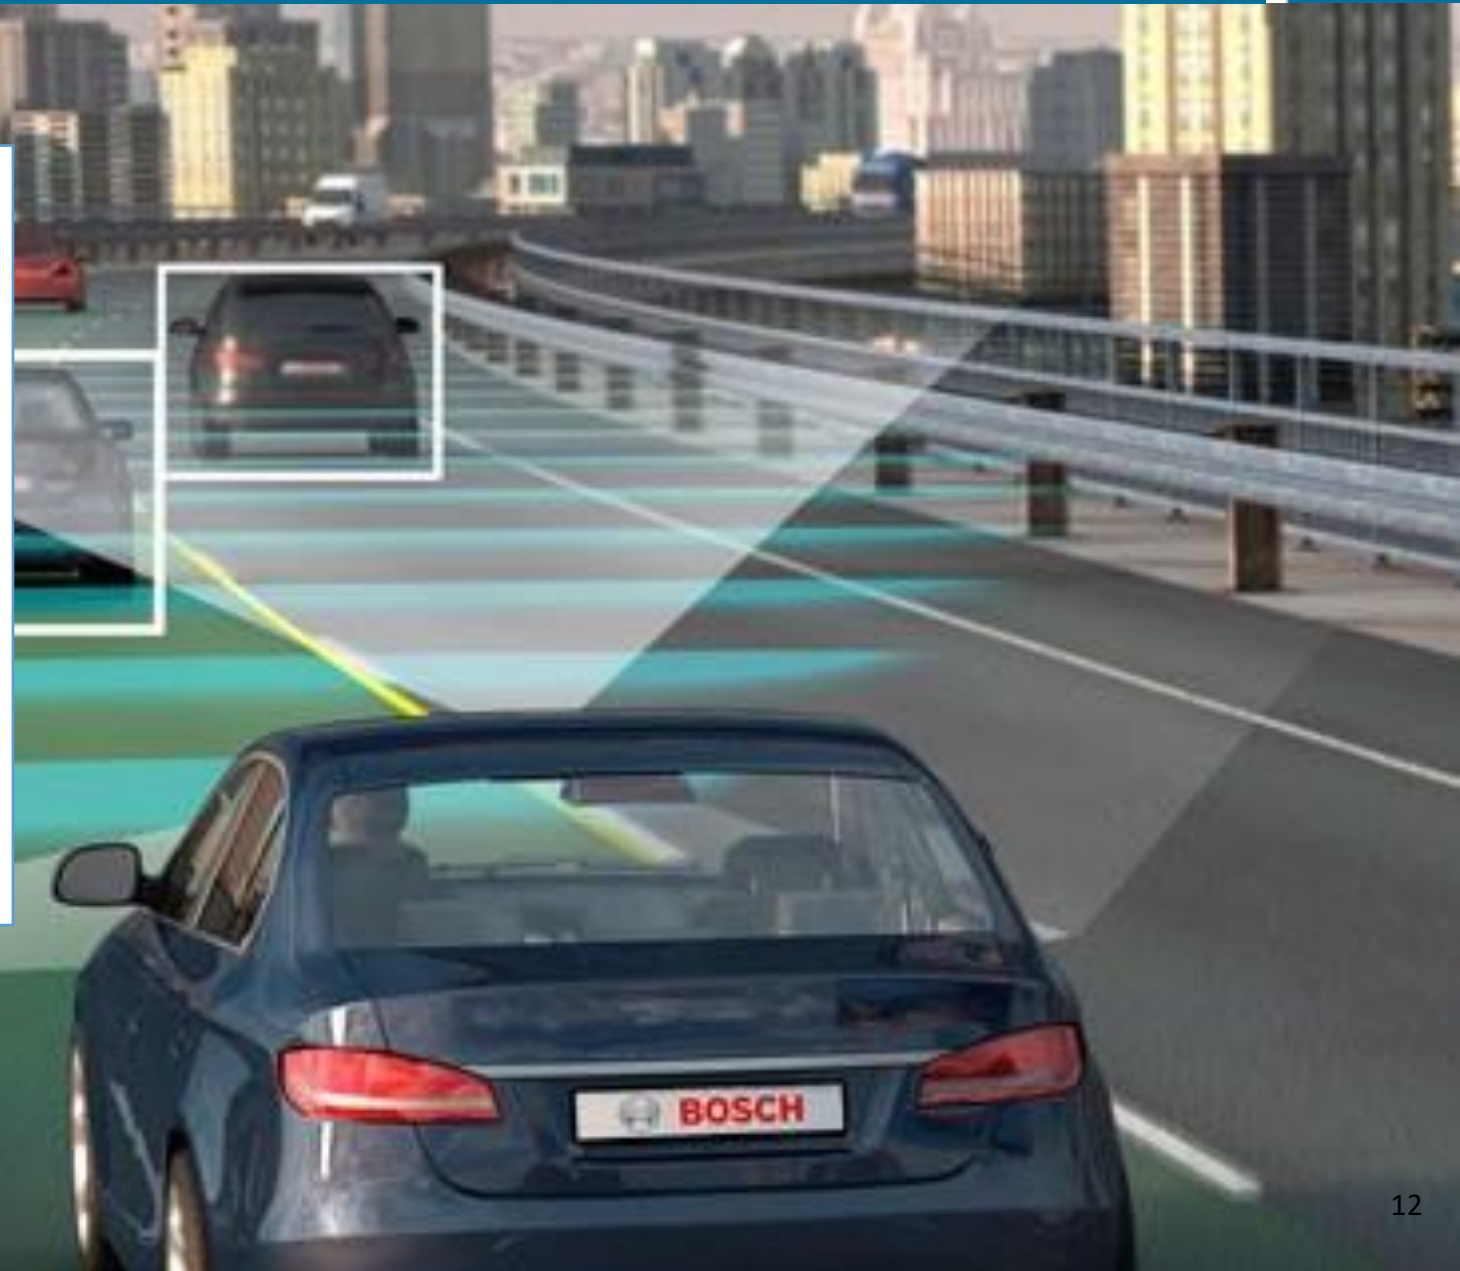

TRANSITION 5G - 6G

1. The Digital Transformation

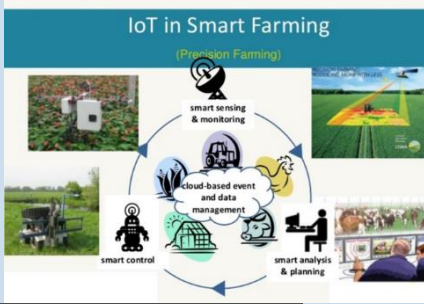


Higher dependency from Cybersecurity, but with new Cybersecurity Solution

UNITY Industry 4.0 Roadmap: Logistics

Logistics					
Supply Chain Logistics	Local Operating Structure	Global Operations Structure	Partial Global Resource Planning / Controlling	Complete Global Resource Planning / Controlling	Open and Flexible Operations Footprint
Inbound Logistics	Push Delivery Process	Pull Delivery Process / JIB	Vendor Managed Inventory	Autonomous Inventory Management	Predictive Inbound Logistics Management (Big Data)
Warehouse Management	No Automation	Automatic Warehouse System	Automatic Warehouse Network	Supply Chain Warehouse Network	No Warehouse in Supply Chain
Intralogistics / Line Feeding	Manually steered rack, trolley	Manually steered train	Autonomous FTS on fixed routes	Autonomous FTS on open area	Autonomous FTS on open area steered by production machine
Outbound Logistics	Push Delivery Process	Order-Based Delivery Management	Active Delivery Management	Automatic Delivery Management	Predictive Delivery Management
Logistics Routing	Decentralized Vehicle / Equipment Fleet	Centralized Vehicle / Equipment Fleet	Pre-planned and Centralized Fleet	Real-time Routing and Connected Navigation	Autonomous Transportation Vehicle / Equipment



Under the Skin Surveillance

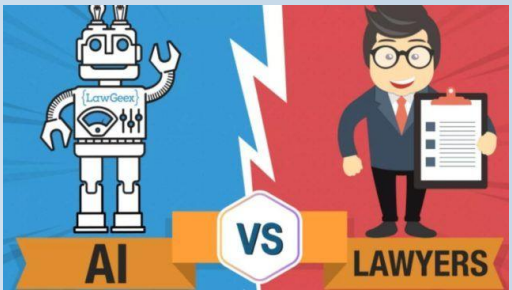

Employability Post 4th Industrial Revolution (OECD):

- Automation **affects mainly industry and agriculture**, but trade and services are also vulnerable to automation;
- About **14% of existing jobs in OECD are highly automated**, while **32% of jobs can suffer a main change** on the way they are done;
- **Younger people who enter the job market are more vulnerable to automation** than jobs developed by more experienced people;
- **Higher risk** is associated to **jobs with higher level of routines, lower skills and lower incomes**;
- **Lower risk** is applicable to jobs related to **creation, maintenance and administration of technologies, creative intelligence, organizational manipulation, social intelligence**;
- **Not all jobs technically automated will disappear**. Moreover, **other jobs will be created**, predicting that **employability will continue to rise**.

Environment vs Technology



• Technologies link with Climate & Environment:

• More eficiente use of resources

- Mobility
- Energy (renewable energies)
- Industry
- Smart Cities
- Smart Logistics
- Telework
- eLearning
- Robotics

• Digital Transformation →
Energetic Transformation →
Ecological Transformation

• Transformations bursted by COVID-19 crisis.


1. The Digital Transformation

2.5G Communications

3. 6G Communications

TRANSITION 5G - 6G


2. 5G Communications

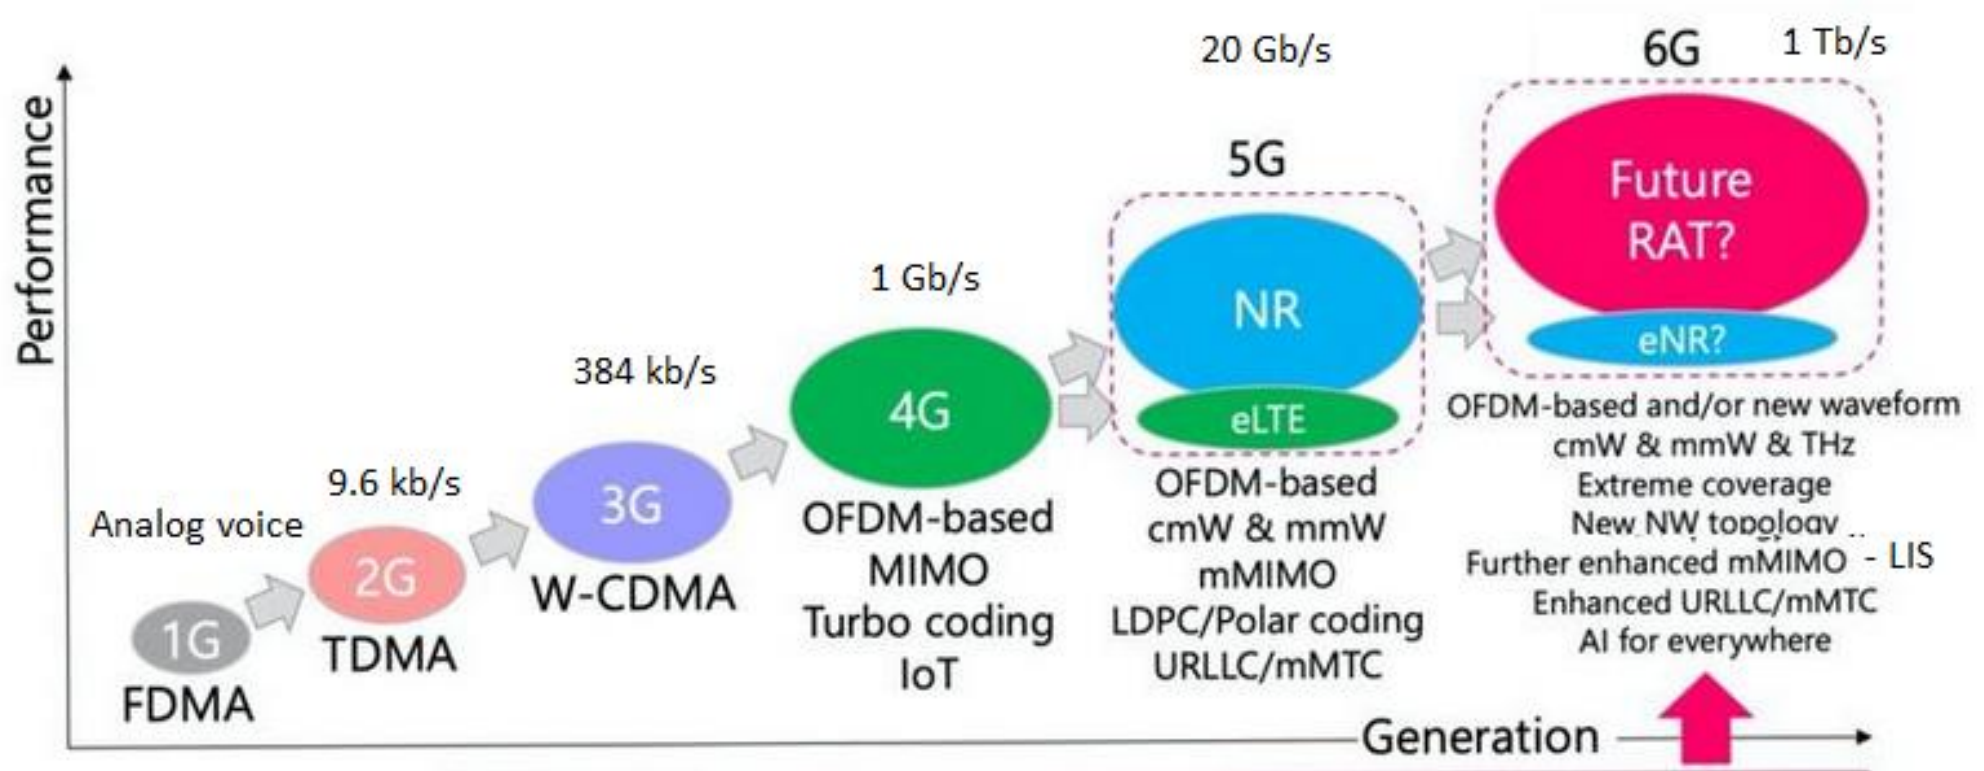

2. 5G Communications



- **Disruptive:** Not only **higher throughputs**, but **IoT-oriented (w/out base station)**, **increased Capacity**, and **lower lattendies Massive MIMO, Millimeter Waves & V2V**
- **Capacity:** Up to **15 Tbps/km2** Indoor environment.
- **Spectral Efficiency:**
 - Downlink 30bit/s/Hz - services require more in the downlink
 - Uplink 15bit/s/Hz - uplink is the bottleneck, due to lower Tx Power, and lower number of Tx antennas, ...

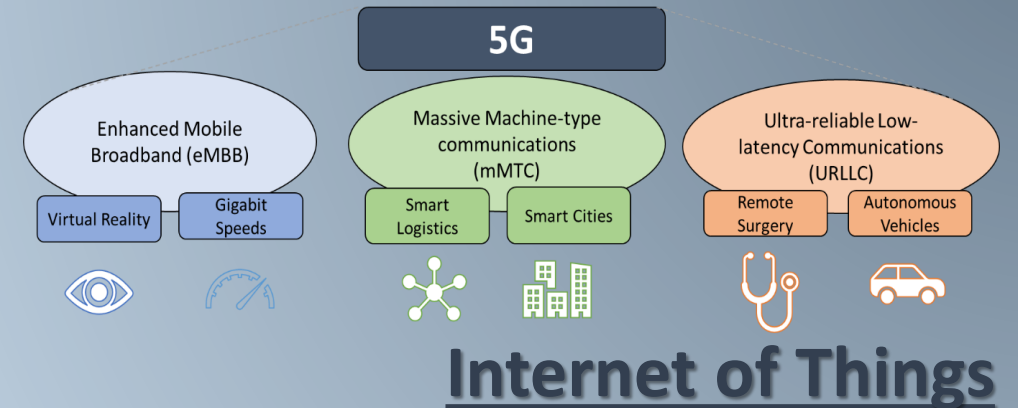

- **Main Differences:** 3 Use Cases – Improved Resilience of services (Network Slicing, ex: Virtual Reality, autonomous vehicles & smart cities):
 - (1) Normal + Higher Speed;
 - (2) Terminal-to-Terminal → Internet of Things & Security (Tetra)
 - [2.1] Sensitive to delay and very reliable (Communication & Sensors) → Edge Computing
 - [2.2] Smart Cities) → one million devices per square kilometer, and each device should have up to 10 years of autonomy or more [ITU]

Capabilities		5G	4G
Peak Data Rates		20 Gb/s (downlink)	1 Gb/s (downlink)
Experienced Data Rates	eMBB	100 Mb/s (downlink)	10 Mb/s (downlink)
Mobility Speed		500 km/h	350 Km/h
Connection Density	mMTC	1 million devices per Km ²	100,000 devices per Km ²
Latency	URLLC	1 ms	10 ms

Roadmap to 5G Communications

Phases of 3GPP Standardization for 5G:

1. [2018] **3GPP Release 15**: Improvement of 4G (eMBB), with increased speeds and IoT support, in Non-standalone (NSA) Mode & Standalone (SA) [Radio Access, Core & Transport Networks]
 2. [2020] **3GPP Release 16**: Implementation of the other two use cases: mMTC & URLLC, Network Slicing (splitting services in different use cases/QoS, reserving resources), etc -> Services Resilience.
 3. [2022] **3GPP Release 17**: Several improvements to 5G, as improvement to URLLC, Network Slicing, improved capacity, remote control of vehicles, etc.
- Phased Implementation and differentiated by different Countries and Operators.


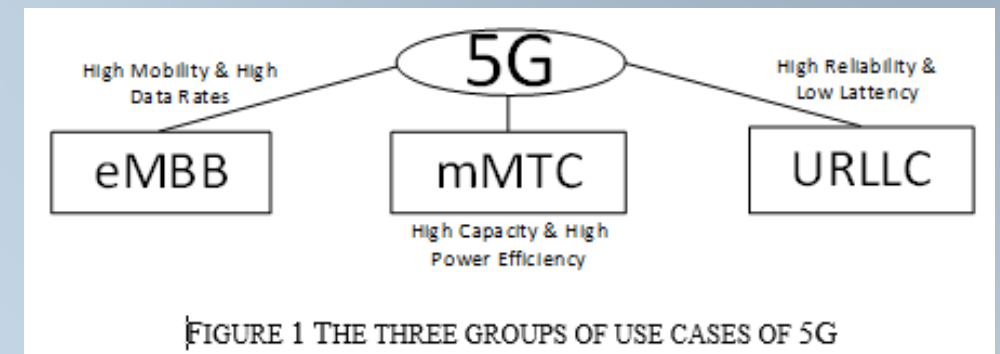


FIGURE 1 THE THREE GROUPS OF USE CASES OF 5G


TRANSITION 5G - 6G

2. 5G Communications

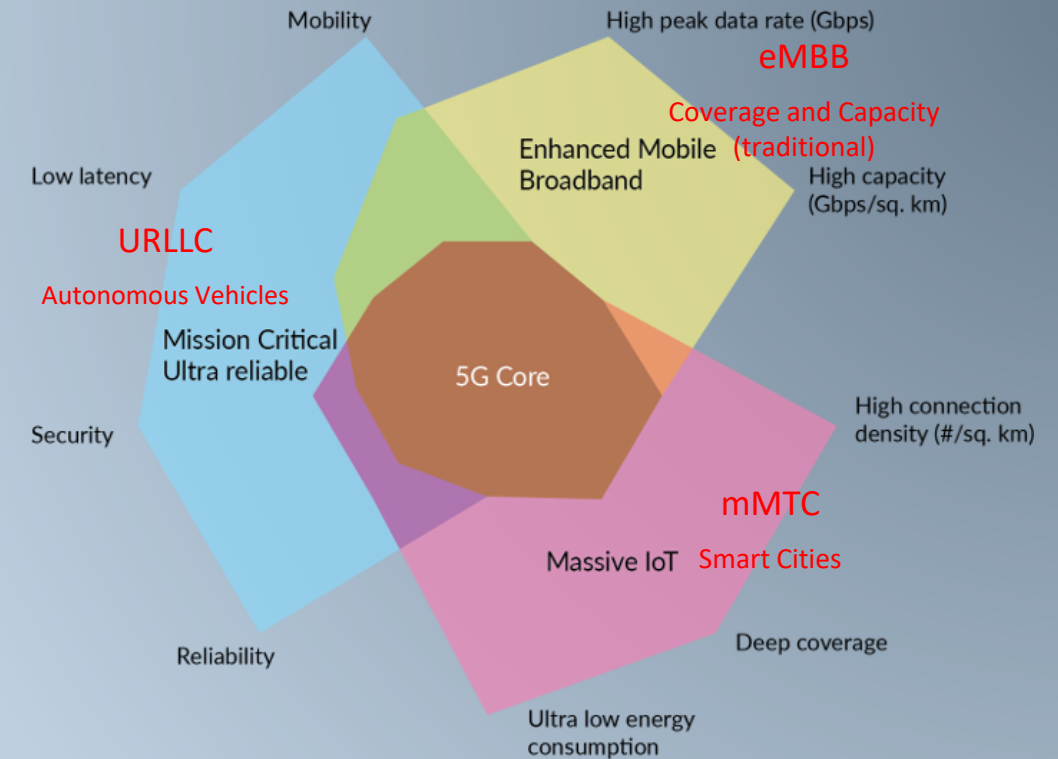


5G systems (2019/20) are aimed to achieve [as compared to 4G]:

- Higher throughputs (20 Gbps)
- Lower Latency (0,5-1 ms)
- Higher Capacity
- Better Spectral Efficiency




Support of new and Emergent Services:

- **VTC on the Move**
- Real-Time Communications
- Augmented Reality
- **Support of Self-Driving Cars**
- **Machine-to-machine communications** (IoT and Security Apps) – in addition to infrastructure centralized architecture

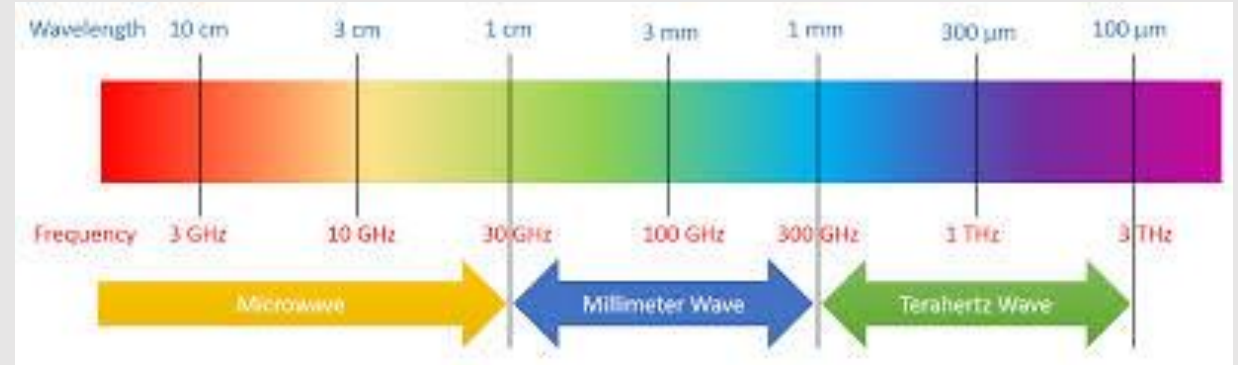


Millimeter Waves & Massive MIMO schemes involving several hundreds of antenna elements are the central technologies for 5G systems

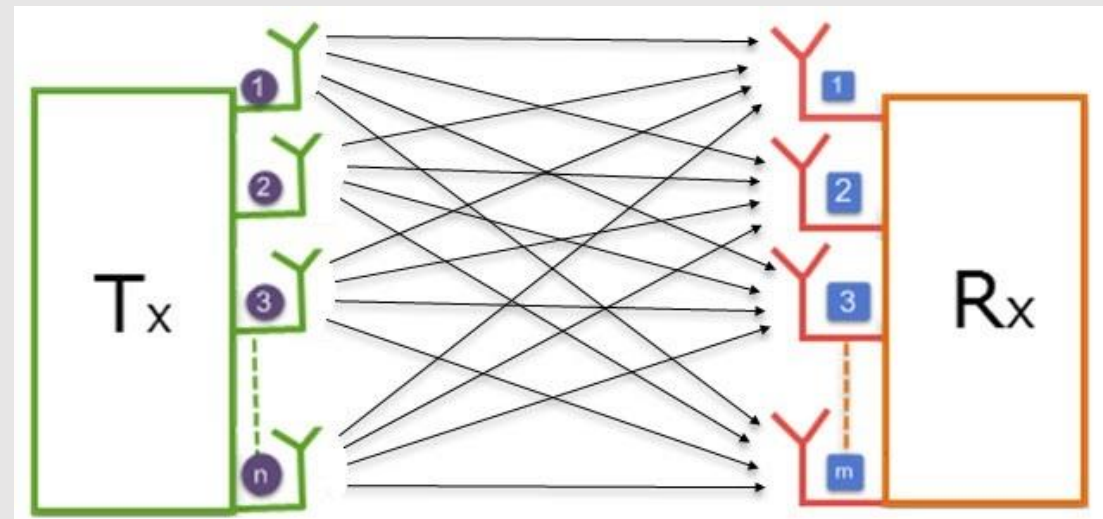

5G – Security Aspects:

1. Vulnerabilities from the Cybersecurity point of view;
2. Human Exposure from Electromagnetic Radiations;
3. Utilization of 5G Communications by Forces and Security Services (e.g., replacing TETRA).

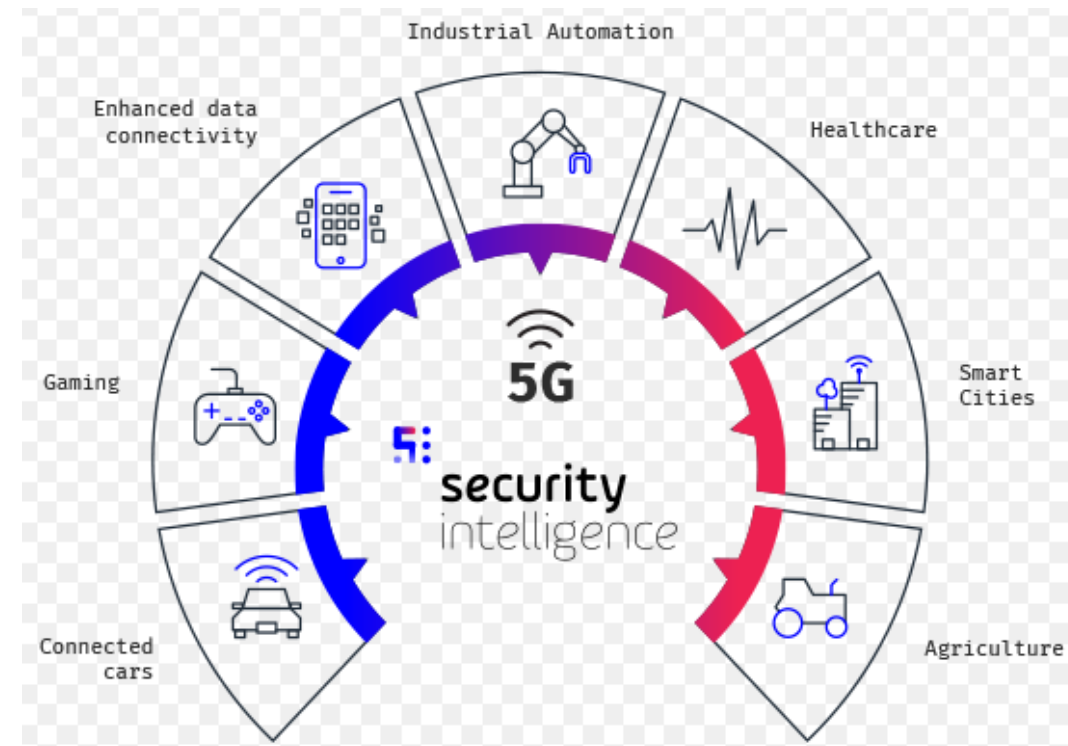


2. 5G Communications

5G Security Aspects:

1 - Vulnerabilities from the Cybersecurity point of view:

- 5G connects billions of IoT devices. While PCs tend to be secure (Firewalls, anti-virus, etc.), such concern is normally not taken into account in the majority of IoT devices developed by external entities but interconnected through 5G (WebCams, Smart TVs, Loudspeakers, refrigerators, smart lockers, Vehicles [autonomous]). These **devices act as an input** to 5G network, allowing reaching other devices.
- The extremely high number of 5G devices, with lower latencies and higher bandwidths, make monitorization of cyber attacks more difficult → Rethink Security.
- The extremely high number of IoT devices supported by 5G makes IPv4 address spacing insufficient. **5G is typically associated with IPv6, where IPSec is embedded** using Authentication Header (AH) or Encapsulation Security Payload (ESP).
 - **AH:** Protects from attacks against Authenticity and Integrity.
 - **ESP:** Protects from attacks against Confidentiality
- What happens within the MANUFACTURER CLOUD? Which kind of data is stored, and for which purposes?

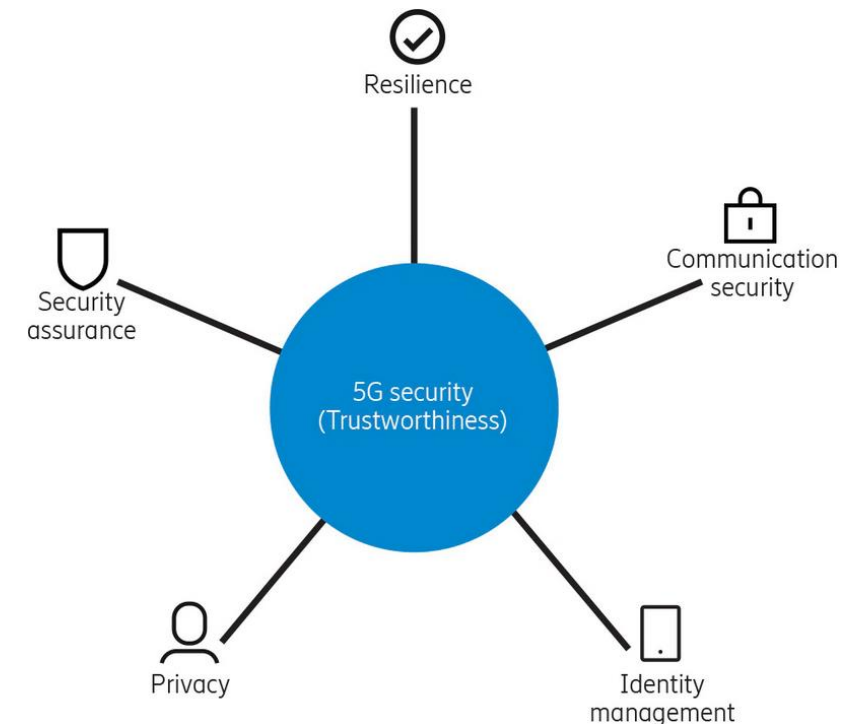

5G Security Aspects:


2 - Utilization of 5G Communications by Forces and Security Services (e.g., replacing TETRA)

- TETRA is still a 2G System - Used by police, militaries, firefighters, etc..
 - Very low data rates
 - Very low capacity (collapses in fire scenarios)
- Some Comms Requirements used by Security Forces:
 - **ComSec** (authenticity, integrity, confidentiality): IPv6: 5G OK
 - **Direct mode of Operation**: Device-to-device Communication: 5G OK
 - **Multicast & Broadcast**: 5G OK
 - **Priority of calls and fast setup**: 5G OK
- 5G can also be used as a private network, such as Logistic Centers or Forces & Security Services.
- Network Slicing can be employed to reserve resources in public 5G network for creating private networks
- Virtualization and Software Defined Network (SDN), used in 5G, facilitates the customization of network, adapting to specific requirements.



MIMO Systems

- The basic concept behind Multiple Input Multiple Output (MIMO) techniques relies on exploiting the multiple propagation paths of signals between multiple transmit (Input) and multiple receive (Output) antennas.
- In the case of frequency selective fading channel, different symbols suffer interference from each other, whose effect is usually known as Intersymbol Interference (ISI). This effect tends to increase with the increase of the symbol rate. MIMO systems can be employed to mitigate ISI. The antenna spacing must be larger than the coherence distance to ensure independent fading across different antennas.
- The various configurations are referred to as Single Input Single Output (SISO), Multiple Input Single Output (MISO), Single Input Multiple Output (SIMO) or Multiple Input Multiple Output (MIMO).
- MIMO architectures can be used for combined transmit and receive diversity (performance improvement), as well as for the parallel transmission of data or spatial multiplexing.
- MIMO schemes are implemented based on multiple-antenna techniques, which can be of different forms:
 - Space-time block coding
 - Multi-layer transmission
 - Space division multiple access
 - Beamforming


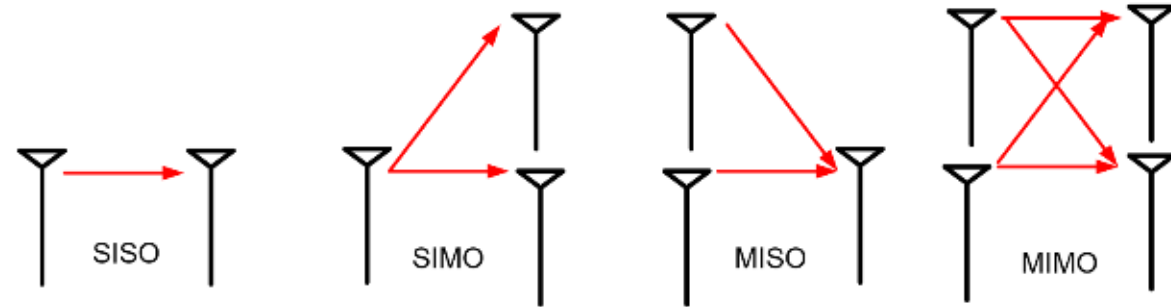


Multiple Antennas Configurations

Beamforming

- In space-time block coding and spatial multiplexing MIMO schemes, the antenna elements that form an array are usually widely separated in order to form a transmit diversity array with low correlation among them.
- On the other hand, the beamforming is implemented by antenna array with array elements at the transmitter or receiver being closely located to form a beam.
- The beam is generated with the Uniform Linear antenna Array (ULA).
- The ULA antenna elements spacing is typically half wavelength.
- Beamforming is an effective solution to maximize the SNR, as it steers the transmit (or receive) beam towards the receive (or transmit) antenna.

Desired direction
(main beam)

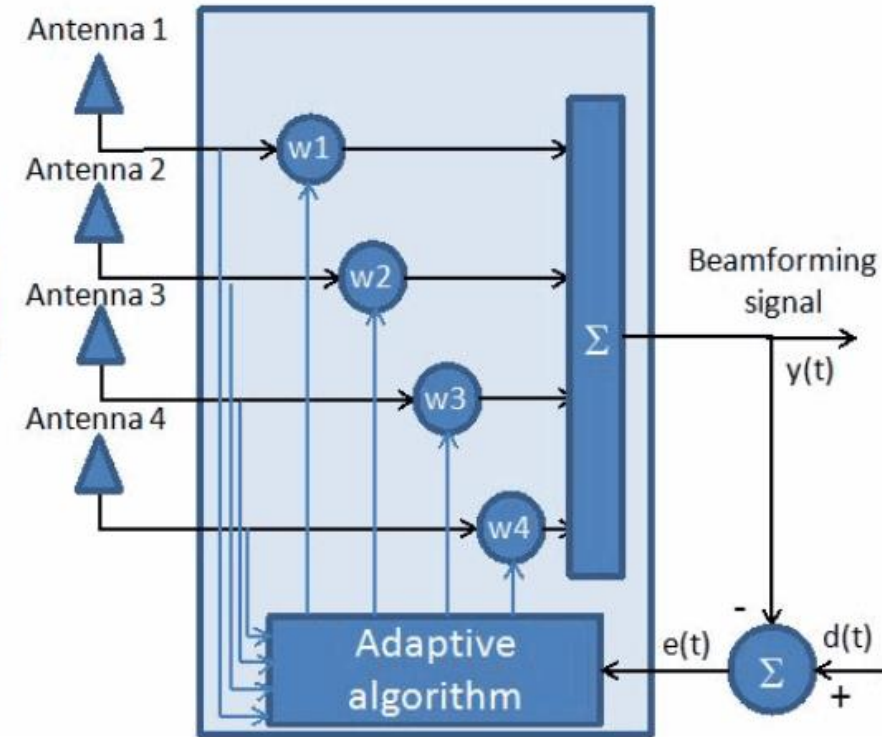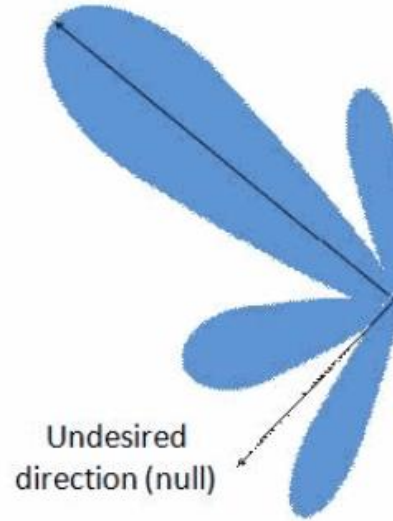

HOW TO ACHIEVE 5G?

**Massive
MIMO**

**Millimeter
Waves**

Base
Station
Coperation

Multi-hop
Relay

All-over IP

Block
Transmission
Techniques
(OFDM &
NOMA)

Adaptive
Modulation
& Coding

Multi-
Resolution
Techniques


Carrier
Aggregation

mm-Wave and Massive MIMO (Large Capacity Gains)

mm-Wave communications (30-300GHz - EHF) are crucial part of 5G systems due to their **increased channel coherence bandwidth**, as compared to centimeter Wave. These systems use carrier frequencies of 30 - 70 GHz, where we have large unoccupied bandwidth. – E.g.: IEEE802.11ad uses 2.16 GHz of BW in **60 GHz band** (ISM band), supporting up to 7 Gbps.

The **distance between antennas is reduced**, facilitating a higher number of antenna elements (Massive MIMO).
Moreover, antennas size are also reduced.

However, mm-Wave suffers from high path loss and rain and oxygen absorption.
Moreover, **higher frequencies present higher propagation path losses**.
5G overcomes this problem with m-MIMO techniques, such as beamforming.

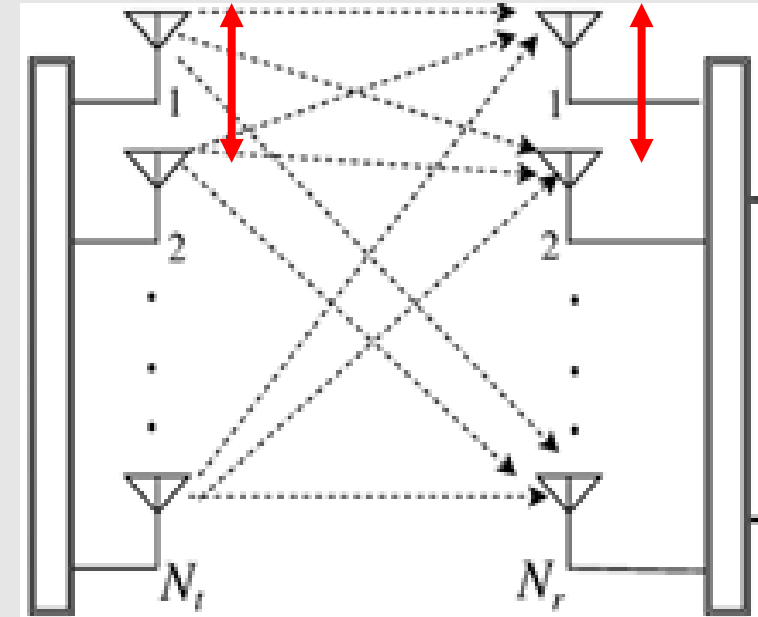

$$c = \lambda \cdot f$$

$$\lambda = c / f$$

$$\text{with } f = 60 \text{ GHz}$$

$$\lambda = \frac{3 \times 10^8}{60 \times 10^9} = \frac{1}{200} = 0,005 \text{ m} = 5 \text{ mm}$$

1. The Digital Transformation

2. 5G Communications

3. 6G Communications

4. 6G Communications

- **5G** focus on the **initial requirements of the 4th Industrial Revolution**.
- 6G (2030) aims to **improve** such implementation.
- The digital society of 2030 and beyond, comprises **more and more connected devices (IoT)**, including sensors, vehicles, aerial drones, and data.
- 6G aims to consider:
 - **Augmented Reality (AR) and Extended Reality (XR)**
 - **Artificial Intelligence (AI) infused applications**
 - **Wireless Brain-Computer Interactions (BCI)**
 - **Holographic services**
 - The integration of communications with localization, mapping and remote control
 - Emerging eHealth applications
 - **Improved autonomous vehicles**
 - More efficient **support of IoT**, namely **smart cities and smart houses**, supporting an extremely high number of low-power devices
 - Support of flying vehicles and increased mobility speed


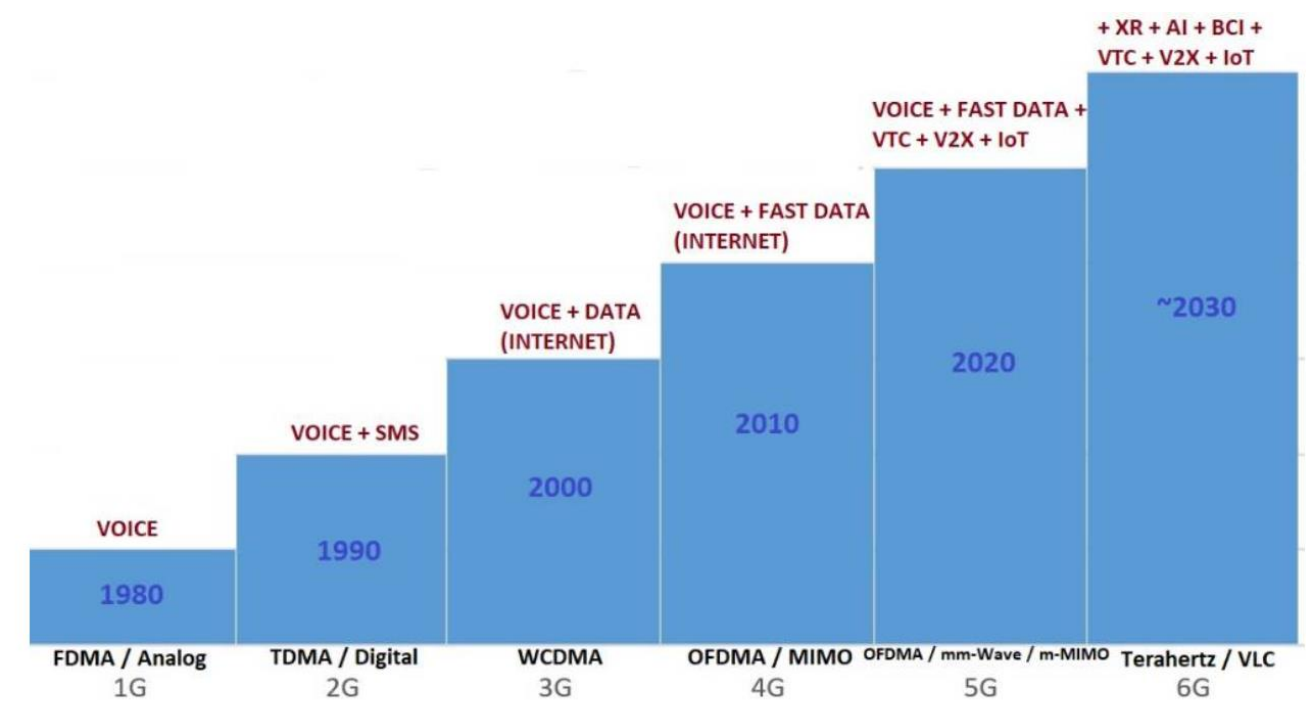




Figure 8. Evolution of cellular generations.



TRANSITION 5G - 6G


4. 6G Communications

- How to achieve 1 Tbps and low latencies, in 6G, focusing on IoT?
 - Large Intelligent Antenna Systems (Antenas LIS)
 - Terahertz Bands Communications & Visible Light Communications
 - Higher Carrier Frequencies correspond to higher channel Coherence Bandwidth
 - Digital Signal Processing

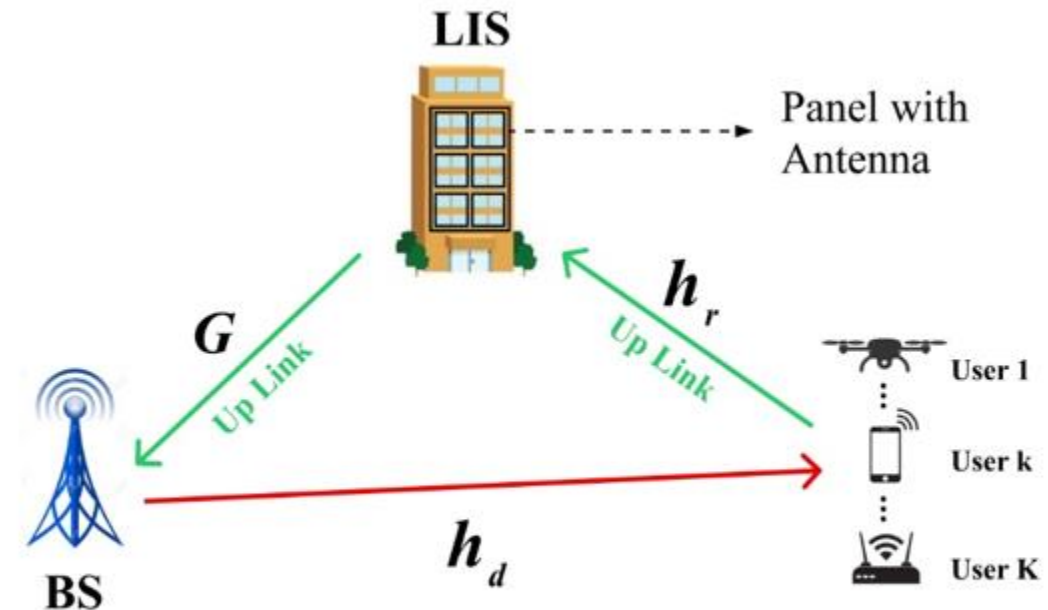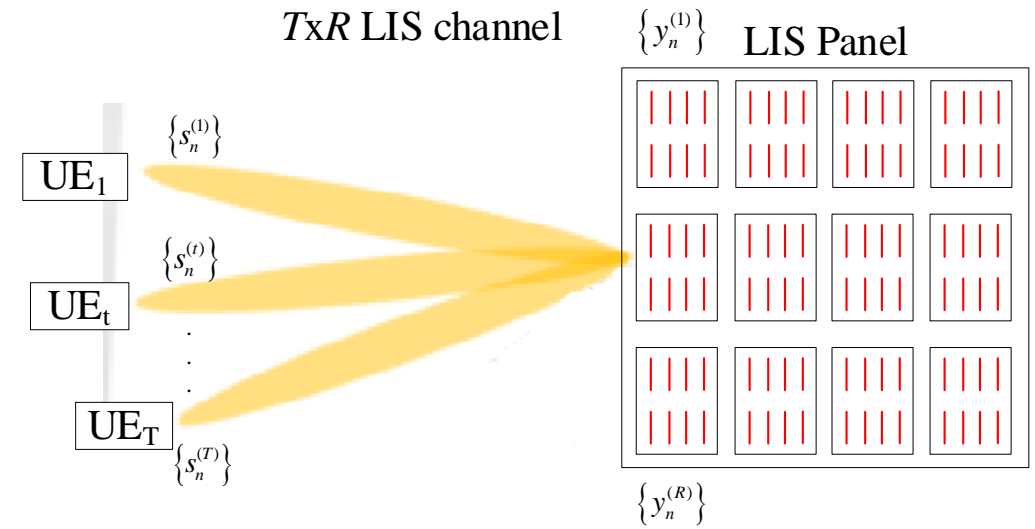


TRANSITION 5G - 6G






4. 6G Communications

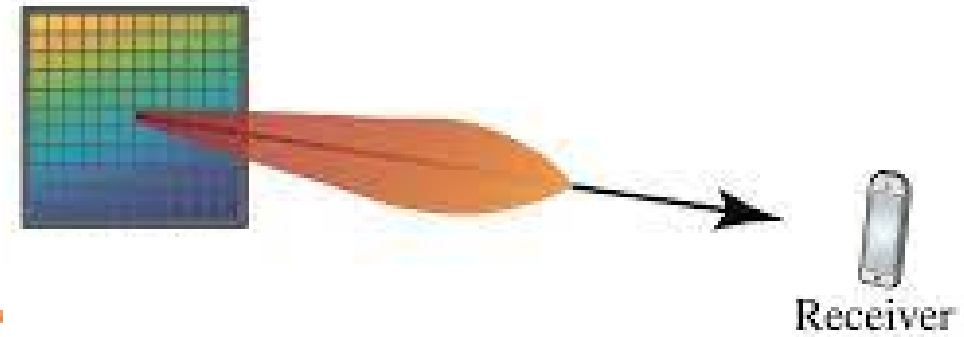

- LIS System:
 - Corresponds to Beyond Massive MIMO (5G) – Higher Number of Antennas
 - The LIS behaves as a near-field beamformer.
 - Traditional far-field wireless communications are typically established at propagation distances greater than the Fraunhofer distance (the Fraunhofer distance is only a few wavelengths).
 - While MIMO systems have an antenna element separation of 3λ to 4λ , the LIS has an antenna element spacing typical of $\lambda/2$.
 - Individual elements of the LIS array can be seen in the far field, but not the whole array, which acts in the short field.
 - So, the focus is set on the distance, the bearing, and the elevation planes. This acts like a lens to focus the sun's energy on a piece of paper. Note that traditional beamforming does not focus on distance, but only on bearing and elevation.
 - LIS is different from traditional beamforming in that it can get rid of interference between users who are aligned, in terms of bearing and elevation, but at different ranges. This makes the process of concentrating energy even better.
 - Some receiver types might allow us to forego the necessity for channel estimation (equalization).

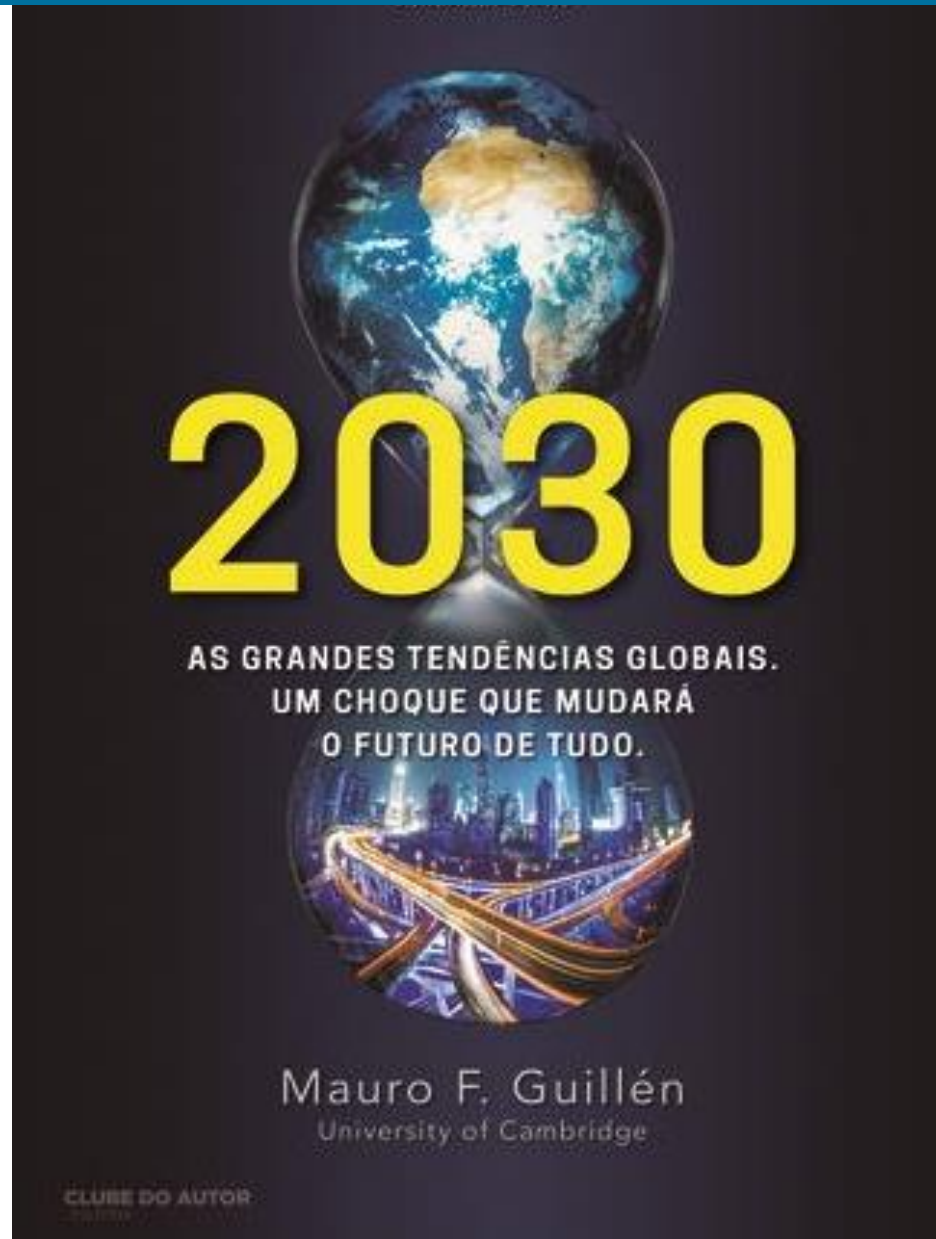

- Mauro F. Guillén é um sociólogo e professor Universitário de Gestão, nos Estados Unidos, e é especialista em globalização, finanças, economia política e estudos culturais.
 - A **quantidade de população pertencente à classe média** é determinante na prosperidade da economia de um país.
 - Importância da existência de uma população jovem na Economia, como força de trabalho, e o **problema demográfico na Europa e EUA**. Aumento da **emigração como forma de mitigação**, com impacto positivo nas economias, situação manipulada por **Populismos**.
 - Aumento do **número de pessoas pertencentes à classe média na China, Índia, Brasil, Rússia**, mas também na **África Sub-Sariana**, como na Nigéria, Quênia, ou África do Sul, como resultado de muitos milhões de quilómetros quadrados de terras agrícolas não cultivadas.
 - Percentagem de superfície terrestre ocupada por cidades, em 2030 corresponderá a 1,1%, com **60% da população mundial**, com aumento do êxodo e emigração.
 - Aumento da **pegada de carbono** na terra e de vulnerabilidade face à **subida do nível do mar**.
 - **Diminuição do número de pessoas da classe média na Europa e nos Estados-Unidos**, com implicações nas economias respetivas.
 - **Emergência da robótica e das criptomoedas como moeda global**.
 - Com a **população mais jovem**, aumento de uma visão global (Informação/Internet, comércio, moedas, etc.), face a regionalismos ou nacionalismos.

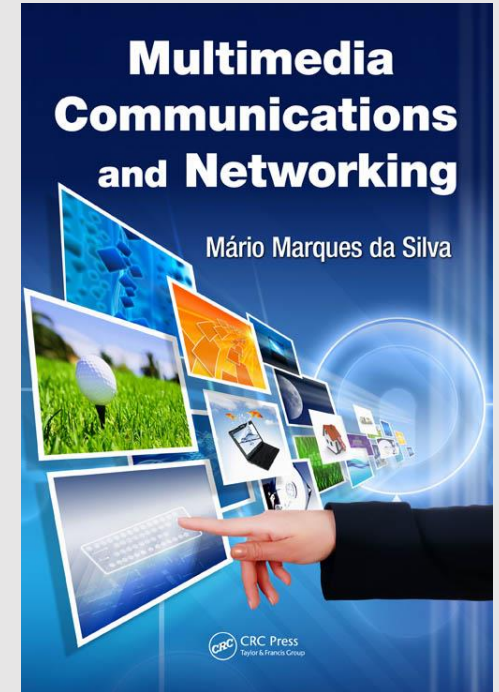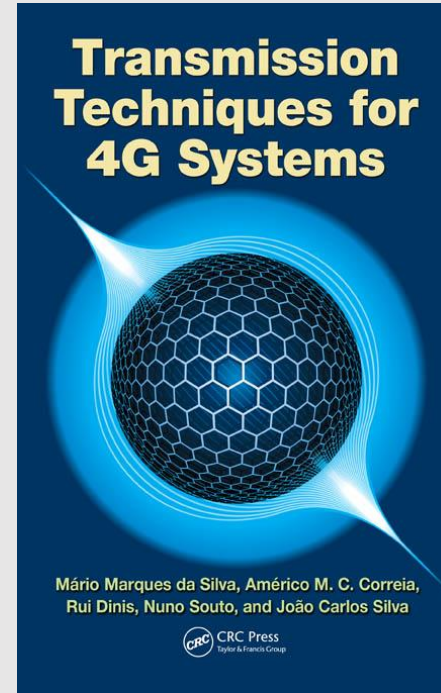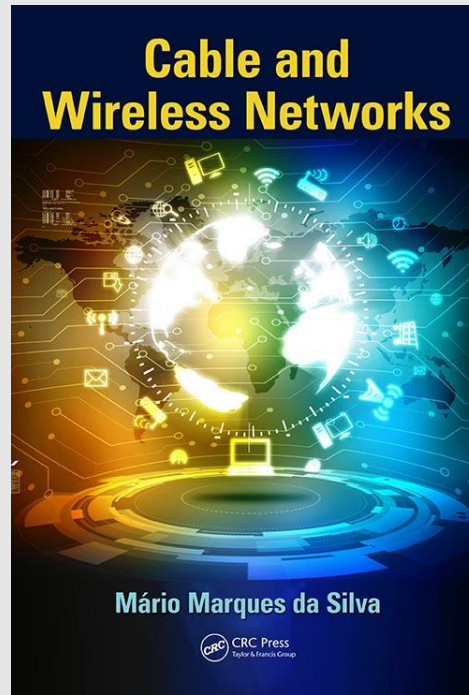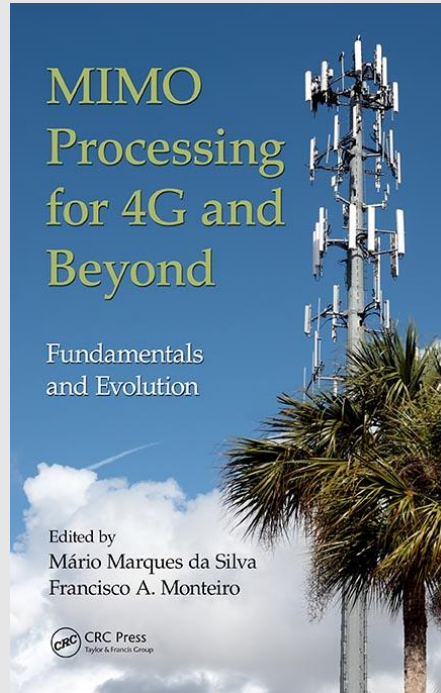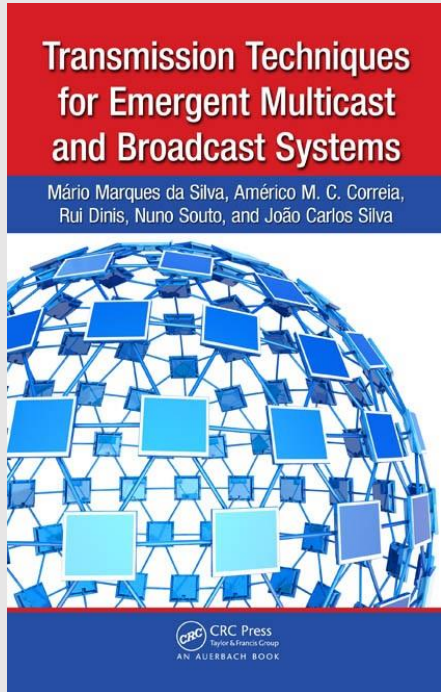

THANK YOU